



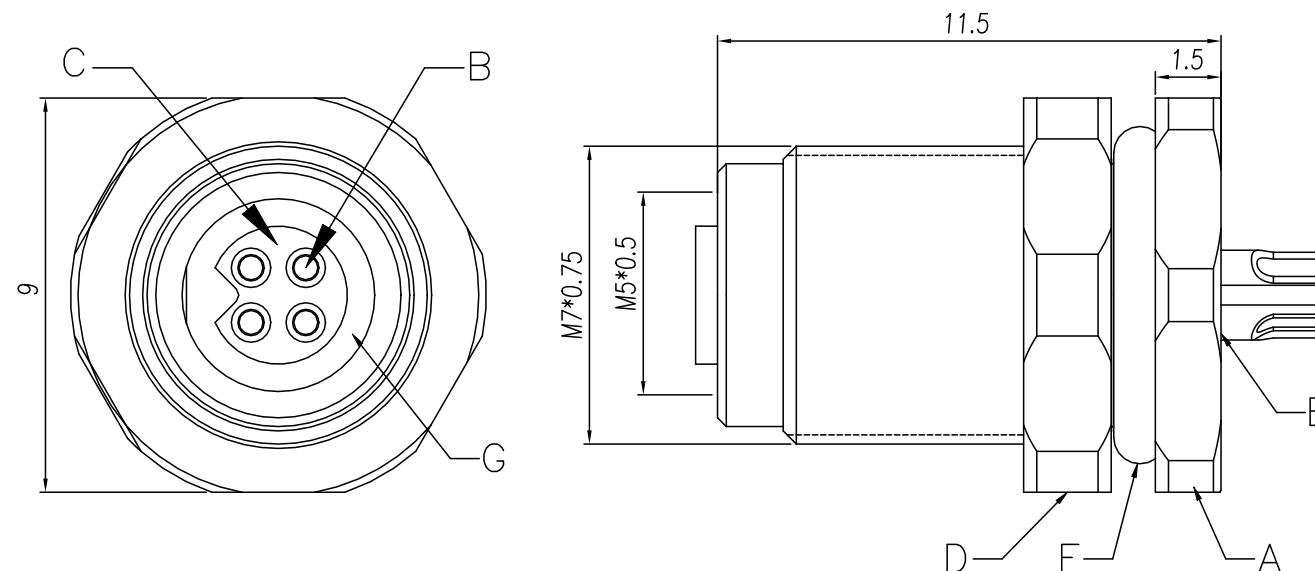

Contacts Pin 数	3Pin	4Pin
Coding 编码	 A-Coding	 A-Coding
Rated Current 额定电流	1A	1A
Rated Voltage 额定电压	60V	60V
Wire Range线范围	26AWG	26AWG
PART NO.品名:	M05-A03-ST0-F02-BQ2	M05-A04-ST0-F02-BQ2
Customized.定制化:		

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	--	/		2021.06.25

IEC 技术参数 IEC Technical Data		IEC61076-2-105
工作温度 Operating temperatur	[°C]	-25~+80
防护等级 IP Class (IN Locked condition)		IP67
额定电压 Rated Voltage	[V]	60
额定电流 Rated Current	[A]	1
导线截面积 Conductor cross section 硬质/柔性导线 Solid/ flexible	[mm²]	0.14
接线范围 Wire Range 单/多芯线 Solid/Stranded	[AWG]	26
材料 Material		
绝缘材料 Insulation Material		PA 66
阻燃等级 Imflammability		UL94V-0
导体材料 Contactor Material		铜合金 Copper alloy
导体镀层 Contactive Coating		镀金 Gold Plated
螺母/螺丝 Connector Nut/Screw		Brass With Nickel Plated铜镀镍
符合RoHS环保要求		



Panel cut-out

G		O-Ring	O-Ring FKM Black	pcs	1
F		O-Ring	O-Ring FKM Black	pcs	1
E		Resin	Black epoxy resin for sealing	g	1
D		Nut	Nut:M7X0.75,Brass With Nickel Plated	pcs	1
C		Housing	A-Coding Female,Black PA66	pcs	1
B		Terminal	Female Terminal ,Brass With Gold Plated	pcs	X
A		Screw	Screw M5X0.5,Brass With Nickel Plated	pcs	1
编号 No.	料号 Materials No	品名 Name	材 料 规 格 Description	单位 Unit	用量 Qty

 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD								PART NO.: M05-AXXP-ST0-F02-BQ2			
NO SPECIFIED TOLERANCE			Cus' P/N:		Order No :			---		Drawing No.:	SP-02-M000XX
LINEAR	0.5~6	±0.1	DES.	JUN	DATE		UNITS	mm	THIRD ANGLE PROJECTION		PAGE
	6~30	±0.2									
	>30	±2%									
ANGLES	±1°		APP.		DATE		SCALE	X:X	文件等级:外部公开		