

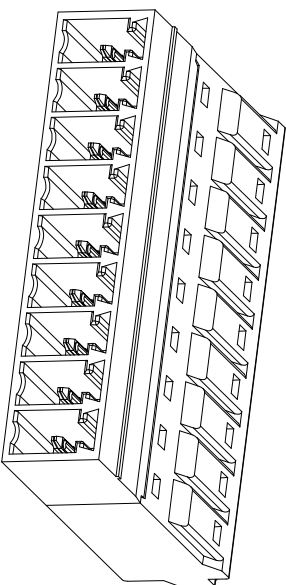
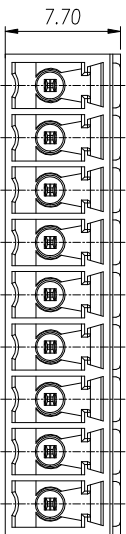


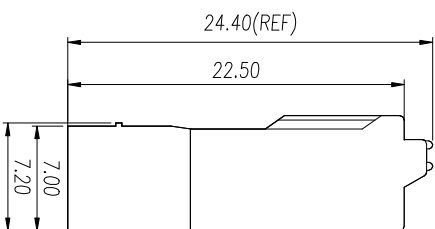

慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE

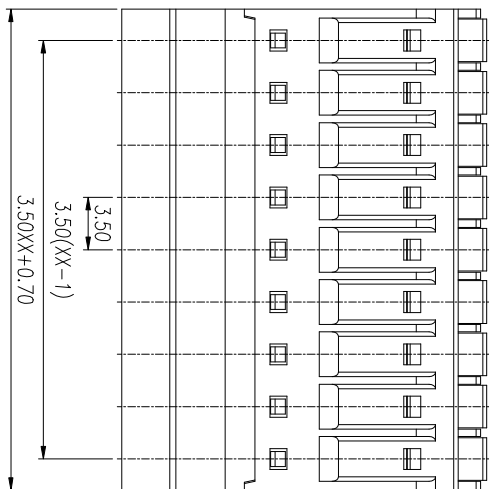

UL/CUL 技术参数		cULus			
UL/CUL Technical Data		B	C	D	
等级	Use Group	B	C	D	
额定电压	Rated Voltage [V]	300	-	300	
额定电流	Rated Current [A]	8	-	8	
接线范围	Wire Range	24-16			
单/多芯线	Solid/Stranded [AWG]				
耐压	Withstanding Voltage	1600V/1Min			
IEC 技术参数		IEC61984			
IEC Technical Data					
过电压类别	Overvoltage Category	III	III	II	
污染等级	Contamination Class	3	2	2	
额定电压	Rated Voltage [V]	160	160	320	
额定电流	Rated Current [A]	8	8	8	
额定冲击电压	Impulse withstand voltage [kV]	2.5	2.5	2.5	
导线截面积	Conductor cross section	0.5-1.5			
硬质/柔性导线	Solid/flexible				
材料	Material				
绝缘材料	Insulation Material	PA66			
阻燃等级	Inflammability	UL94V-0			
导体材料	Contact Material	铜合金 Copper alloy			
导体表面镀层	Contactive Coating	镀锡 Sn Plated			
一般参数					
间距	Pitch /极数	[mm] / [P]	3.5 / 02-24		
剥线长度	Shipping Length	[mm]	9-10		
螺丝	Screw/扭矩	[N.m]	-		
工作温度	Operating temperature	[°C]	-40~105		
焊接温度	Soldering temperature		-		
引脚尺寸	Pin Dimensions	[mm]	-		
PCB板孔径	PCB Hole Diameter	[mm]	-		

linear dimension (Tolerances Standard GB/T 14486-2008)

variable range	tolerance	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 100
±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	2:1	
名称 / TITLE	慈溪市万捷电子有限公司				版本 / REV	V0
WJ15EDGKNR-3.5-XXP-1YY-40A					第三视图/THIRD ANGLE PROJECTION	



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD